


BADU® Magic

Self-priming circulation pumps Selfvoervoersirkulasiepompe

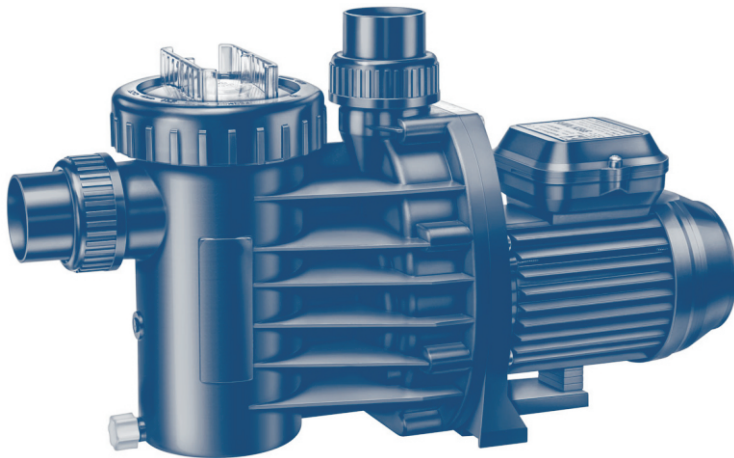

BADU® Magic

The BADU® range remains unsurpassed in its quality of material and workmanship and its functional durability.

More than a million BADU® range of pool pumps are performing flawlessly in countless swimming pools, koi ponds and spas all over the world. Speck Pumps high quality continues with the BADU® Magic range of pumps.

The BADU® Magic range of pumps is especially designed for applications in small filtration plants, splash pools, koi ponds and water features. The pump can be installed maximum 2m above or 3m below water level. The pump must be installed on a flat area that would not flood in heavy rains.

Die reeks BADU®-pompe is ongeëwenaard wat betref gehalte van materiaal, vakmanskap en langdurige, bestendige werkverrigting. Meer as 'n miljoen BADU®-swembadpompe werk foutvry in 'n menigte swembaddens, koidamme en spabaddens oor die wêreld heen. Met die BADU® Magic-modelle bou Speck Pumps voort op sy reputasie van voortreflikheid.

Die BADU® Magic-pompe is spesifiek ontwerp vir gebruik in klein filterinstallasies, plonsbaddens, koidamme en waterfonteine. Die pomp kan maksimum 2m bo of 3m onder die watervlak geïnstalleer word. Dit moet op 'n gelyke oppervlak geïnstalleer word waar dit nie in swaar reën sal oorstrom nie.

FEATURES

- Plastic material combination of Polypropylene and 20% Tetrafluoro.
- Self-priming
- German design mechanical seal using carbon to ceramic sealing surfaces.
- Total electric separation.
- High efficiency.
- Stainless Steel shaft.
- Available in 2 sizes.
- Temperature stability up to 60°C.
- Plastic components are 100% recyclable.
- Fully factory tested.
- New 2 part easy screw on/off lid.
- 24 month ex-factory warranty under normal operating conditions from date of purchase.

EIENSKAPPE

- Plastiekmateriaal 'n kombinasie van polipropileen en 20% tetrafluoro.
- Selfvoervoersirkulasie
- Duits-ontwerpte meganiese seël vervaardig van koolstof-na-keramiek-seëloppervlakke.
- Totale elektriese skeiding.
- Uiters doeltreffend.
- Vlekvrye staal-as.
- Beskikbaar in 2 groottes.
- Stabiele werkverrigting in temperature van tot 60°C.
- Plastiekkomponente is 100% herwinbaar.
- Volledig fabriek-getoets.
- Nuwe tweedelige deksel wat maklik aan- en afskroef.
- 24 maande fabriekswaarborg onder normale werktoestande vanaf datum van aankoop.

Code / Kode

2191060038
2191080038

Description / Beskrywing

BADU® Magic 6
BADU® Magic 8

Voltage / Spanningstrek

1~230V
1~230V

Power output P2 / Kraglewering P2

0.25kW
0.45kW

Technical data / Tegnieese data

Inlet / outlet connection (Rp)2*
Inlet / outlet pipe, PVC-pipe, d4*
Power input P1 (kW)
Power output P2 (kW)
Rated current (A)

1~230V
1~230V
1~230V

BADU® Magic 6

50/50
50/50
0.45
0.251
2.10

BADU® Magic 8

50/50
50/50
0.67
0.451
3.10

Motor speed approx. (rpm) 2840
Max. Water temperature (°C) 60
Max. Casing pressure (bar) 2.5

Motorspoed ongeveer (r.p.m.) 2840
Maks. Watertemperatuur (°C) 60
Maks. Omhulsedruk (bar) 2.5